
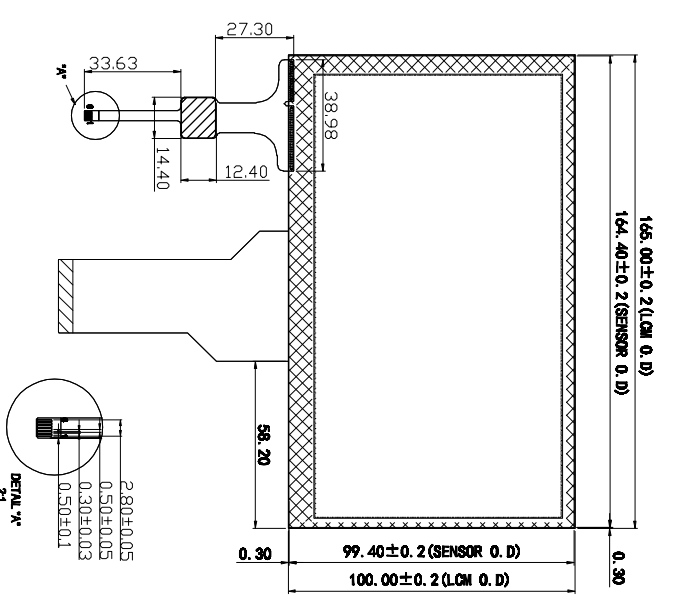
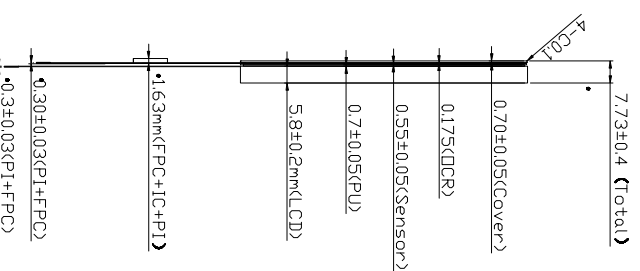


No ROHS hazardous material

Original	Modify content description	Cartographer	Date of change
①			

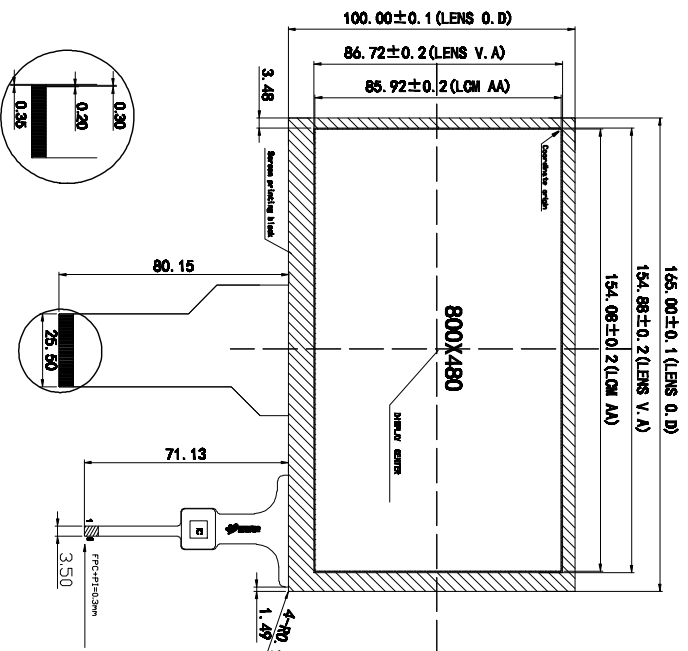

Screen printing area: Print Black

Frame adhesive foam area = 0.7mm

Front view

Side view

Back view

TP	PIN:
1	INT 3.3V
2	VDD 3.3V
3	SCL 3.3V
4	SDA 3.3V
5	RST 3.3V
6	GND

Technical parameters

1. Interfaces:	12C	7. Stability range:	45~85KHZ
2. Structure:	G+G	8. Transmittance:	≥85%
3. IC solutions:	CY7MA689	9. Action hardware:	≥6H
4. Insent resistance:	100Ω/100V/100V/100V	10. Operate:	-20°C~+70°C, ≤85KHZ
5. Touch points:	10 points	11. Storage:	-30°C~+80°C, ≤85KHZ
6. Power supply:	3.3V	12. Unmarked dimension tolerance:	as±0.2

TFT PINKHX070NL22-50ND-181D

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
LD+4	LD+4	LD+4	LD+4	GND	VDD	VDD	MODE	DE	VS	HS	B7	B6	B5	B4	B3	B2
18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
B1	B0	G7	G6	G5	G4	G3	G2	G1	G0	R7	R6	R5	R4	R3	R2	R1
35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	
R0	GND	DECLK	GND	L/R	U/D	VGH	VGL	AVDD	RESET	NC	VDDH	UTRBI	GND	NC	NC	

		杭州宏巢科技有限公司		Grahawlet Technology CO., Ltd			
		Model	HX0701702		view direction	Unit	
Version	V2.0	Designer	Jason	Date	2017-4-5	Revision	A1
Customer		Approved	HBZ	Date	2017-4-6	Preparation	1:1