

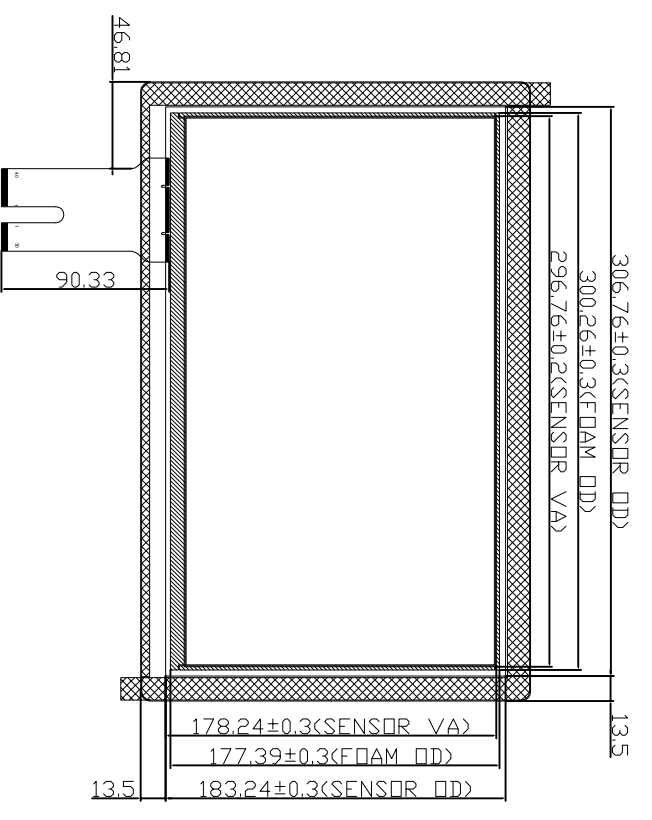
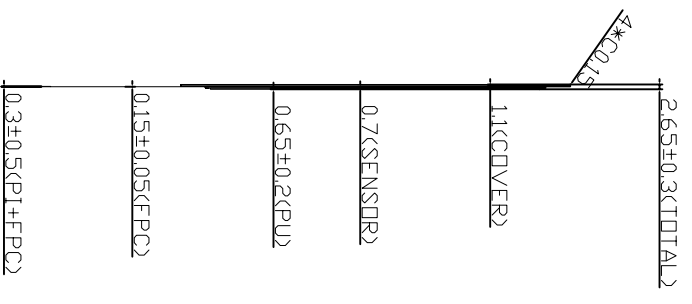


No ROHS hazardous material


Ordinal	Modify content description	Cartographer/date of change
Δ		

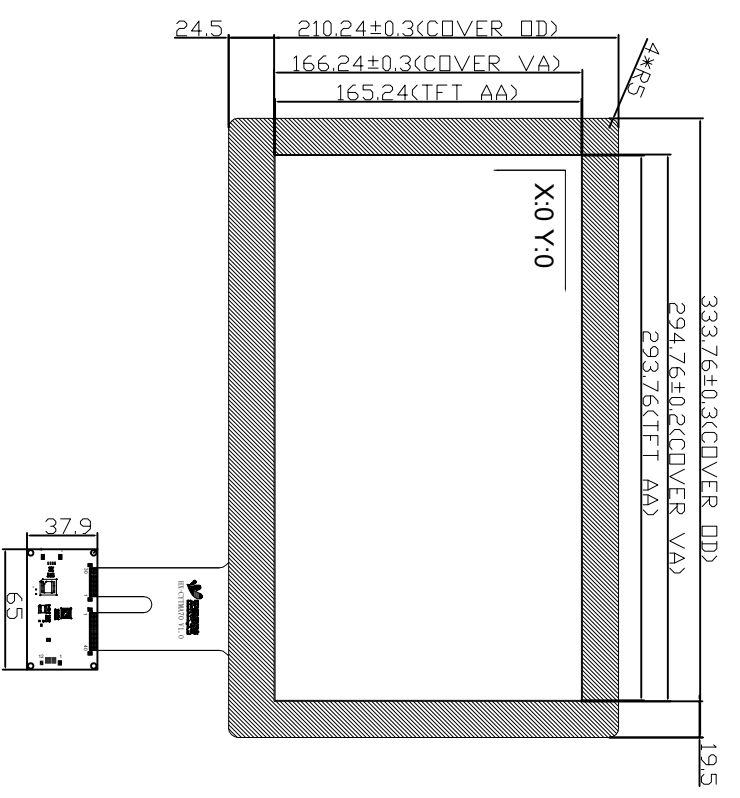

Screen printing area: Print Black



Frame adhesive foam area = 0.65mm



Frame adhesive area = 0.175mm

Front view

Side view

Back view

USB Connector (U1)
1 VCC(5V)
2 DN
3 DP
4 GND

Technical parameters

1. Interfaces:	USB/IIC	7. Humidity range:	45~85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	CYTM4568	9. Surface hardness:	≥6H
4. Impact resistance:	0.001kg Steel Ball/132g/1m/15mm	10. Operate :	-20℃~+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30℃~+80℃, ≤85%RH
6. Power supply:	5V/3.3V	12. Unmarked dimension tolerance	as±0.5

IIC PIN:

1	swdio	7	NC
2	GND	8	NC
3	NC	9	SCL
4	VDD	10	NC
5	NC	11	INT
6	RST	12	SDA



杭州宏臬科技有限公司  
GraHowlet Technology CO., Ltd

Model	Version	Designer	Approved	view direction	Date	Unit
HX1331801	V1.0	LU0	HBZ		2018-9-18	MM
Customer					2018-9-20	AI

Proportion 1:1